

12 VOLT ALLSTATE RADIO CATALOG No. 6266

This apparatus uses inventions of United States patents licensed by Radio Corporation of America and Hazeltine Corporation. Patent numbers supplied upon request.

When ordering chassis parts or writing us about this radio, always give chassis number indicated on metal tag (pictured), on side of case and catalog number shown above.

FOR PARTS OR SERVICE FROM OUR RETAIL OR MAIL ORDER STORES ALWAYS GIVE CHASSIS NUMBER


SEE PLATE ON
SIDE OF CASE

ROEBUCK AND CO.-U.S.A.
IN CANADA, SIMPSON-SEARS LIMITED



C100-762

SEARS, ROEBUCK AND CO. UNITED STATES OF AMERICA WIRING DIAGRAM FOR YOUR RADIO PRINTED IN U.S.A.

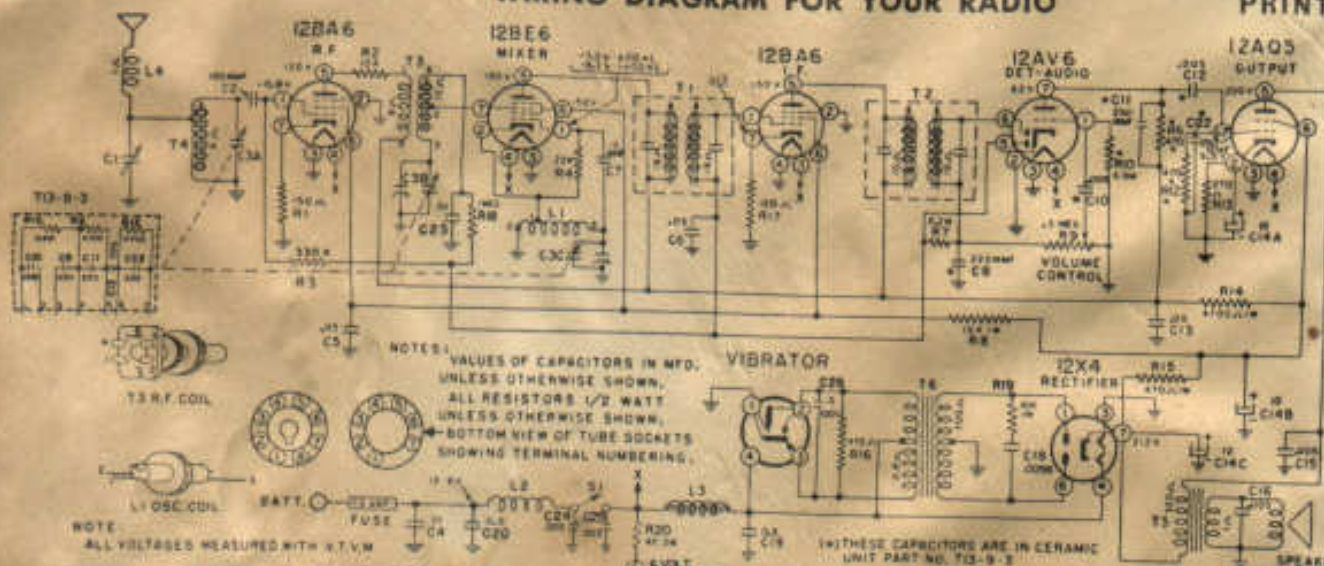

191618

D100-730D

PARTS LIST

Schematic Location	Part No.	Description
CAPACITORS		
C1	T19-150-0	Trimmer, Antenna
C2	T15-10166	Tubular, 100 mmfd., 500 v.,
C3, A, B & C	T19-13-3	Var., Tuning (Inc. worm drive)
C4, C23	T15-10317	Disc, .01 mfd., 500 v., GMV
C5, C13	T16-59343	Tubular, .05 mfd., 400 v.,
C6	T16-50323	Tubular, .05 mfd., 200 v.,
C7	T15-120619	Tubular, 12 mmfd., 500 v.,
		10%, N4700
C8, C10, C11, C12, C22		Parts of Ceramic Coupling Unit (T13-9-3)
C14, A, B & C	T18-3-4	Electrolytic, 10 mfd., 25 v. (A);
		10-10 mfd., 250 v. (B & C)
C15	T20-17-0	Disc, .005 mfd., 1Kv., GP
C16, C24, C25	T15-50217	Disc, .005 mfd., 500 v., GMV
C18	T16-56278	Tubular, .0056 mfd., 1600 v.,
		20%
C19, C20, C26	T20-21-1	Tubular, .5 mfd., 100 vdc., 85°C.
	T20-2-1	Suppression, .5 mfd., 120 v.
RESISTORS		
(All resistors 1/2 watt, unless otherwise noted)		
R1	S60-15102	150 ohm
R2	S60-10302	10K ohm
R3	S60-33402	330K ohm
R4	S60-22302	22K ohm
R6, R10, R12		Parts of Ceramic Coupling Unit (T13-9-3)
R7	S60-22502	2.2 megohm
R8	S60-15312	15K ohm, 1 w.
R9, S1	T24-192	500K ohm VOLUME, ON/OFF Sw. Chassis 528.6266
R9, S1	T24-193	500K ohm VOLUME, ON/OFF Sw. Chassis 528.6264

HOW TO ORDER PARTS FOR YOUR ALLSTATE RADIO

These authorized replacement parts may be ordered through any Sears Retail Store or the Mail Order Store which serves the territory in which you live. Prices upon application from Sears, Roebuck and Co. The parts are shipped prepaid. When ordering parts, always give:

1. The **PART NUMBER** (number printed on the part if different from that shown on parts list) and the **DESCRIPTION**. When no number is assigned order by description and rating.
2. The **CHASSIS number** will be found on a metal plate at the side of the case. This plate is pictured above. The catalog number will be found on this label.

R13	S60-27102	270 ohm
R14	S60-47212	4.7K ohm, 1 w.
R15	S60-47112	470 ohm, 1 w.
R16	S60-47102	470 ohm
R17	S60-12101	120 ohm, 10%
R18	S60-10502	1 megohm
R19	S60-10312	10K ohm, 1 w.
R20	T61-18	47 ohm, 2 w., 10%, wire wound
	T96-4	Suppression, 10K ohm, 15%

TRANSFORMERS AND COILS

T1	T10-45-2	Transformer, 1st I.F.
T2	T10-46-2	Transformer, 2nd I.F.
T3	T10-16-0	Transformer, R.F.
T4	T10-89-1	Transformer, Antenna
T5	T80-304	Transformer, Output
T6	T80-16-0	Transformer, Power
L1	T10-20-4	Coil, Oscillator
L2	T33-229	Coil, "A" Line Choke
L3	T33-239	Coil, Vibrator Hash Choke
L4	T10-88-1	Coil, Antenna Noise Choke
	T84-233	"A" Lead Assembly
	T79-422	Speaker, 4" x 4" P.M.
	T34-107	Vibrator

B88-994E